
MAXIMUM SPAN \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc \bigcirc PANEL END JOINT COVERED BY 150 X 0.6MM FOLDED COLORBOND 0 \bigcirc \bigcirc \circ \bigcirc 0 WITH EXPANSION "V" BEND FIXED WITH 23MM STEEL (SELF TAPPING) SCREWS / RIVETS INTERNAL SIDE: @ 400MM CTRS MAXIMUM SPAN SEE SPAN CHART **EXTERNAL SIDE:** @ 300MM CTRS MASTIC UNDER & OVERSEALED WITH SIKAFLEX MUSHROOM HEAD M12 GALV. STEEL ALLTHREAD ROD **MAXIMUM SPAN** M12 NUT & 62 X 2.0MM WASHER 0 0 0 9 \circ \circ (MASTIC UNDER EXTERNAL SIDE) 78 X 22MM M12 NYLON MUSHROOM HEAD \bigcirc \bigcirc \bigcirc 0 \bigcirc \bigcirc **CONDUCTION CUT & FLASHING** MAXIMUM SPAN SEE SPAN CHART XFLAM™ CORE **INSULATED CEILING PANEL MAXIMUM SPAN** 0 \bigcirc \bigcirc PANEL END JOINT 0 0 0 \circ \circ

PLAN LAYOUT



THIS DRAWING IS THE PROPERTY OF AUSTRAL INSULATION AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THEIR PRIOR WRITTEN CONSENT.

ALL COPYRIGHT RESERVED.

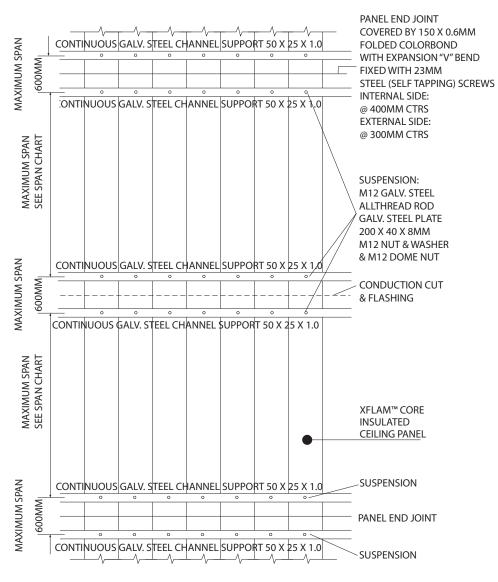

OPTIONAL SUSPENSION PLAN LAYOUT

FIRE RATED DETAILS XFlam™ Panel **TYPICAL SUSPENSION LAYOUT**



Drawn SDH Date 26.03.08 Rev. Checked

Drng. N°. C5